

CompactFloor® THERM PU


Heated and unheated installations



CompactFloor THERM PU
50 Liter (granulate + binder)
Item No. 2 02 710


Design example heated installation

- 1 Any flooring
- 2 Conductive layer, e. g. CompactFloor PRO 12
- 3 Floor heating including pipe, e. g. system IDEAL EPS 30
- 4 Edge reinforcement
- 5 Edge insulation strips
- 6 CompactFloor THERM
- 7 Primer

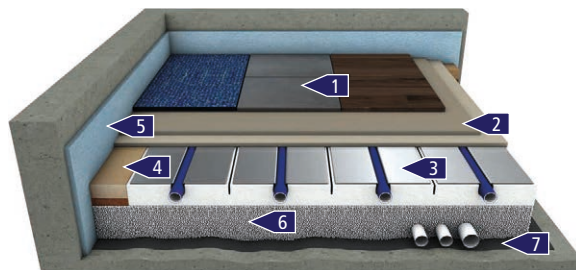

Design example unheated installation

- 1 Any flooring
- 2 Conductive layer, e. g. CompactFloor PRO 12
- 3 Trittschalldämmbahn, e. g. CompactFloor DIRECT 1.5
- 4 CompactFloor THERM
- 5 Edge insulation strips
- 6 Primer

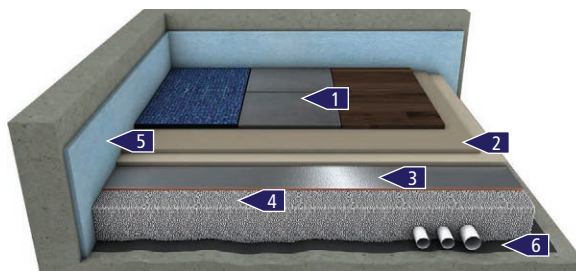

General instructions



For finde levelling, CompactFloor THERM can be plastered with tile adhesive.
Proof of delivery system IDEAL EPS 30: mfh systems GmbH, Hager Feld 8, 49191 Belm.



CompactFloor THERM is not a ready-to-use layer for direct laying of floor coverings.
Before installing CompactFloor conductive layers, CompactFloor THERM must be covered with heating elements, insulation boards or a footfall sound insulation layer.